


# Motor Series **MTRD4b**

## Reversible Synchronous Motor - 500 RPM

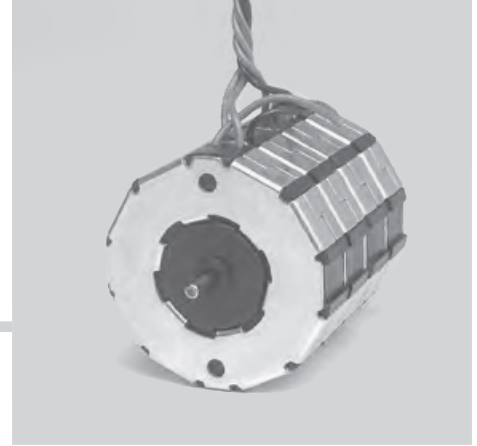

### Application

Recorders, Instrumentation, Diamond machinery, Valve Actuators, Lightdisplays, Textile machinery, Medical equipment, Air conditioning & refrigeration, Dampers, Peristaltic Pumps, Dosing Pumps, Vending machines, CCTV Camera positioning, any timing and positioning Application.

### Design

MTRD4b reversing synchronous motor is of the permanent magnet type with two stator windings, for single phase AC 50/60 Hz. Phase displacement of the excitation current is achieved by connecting a capacitor in parallel with one of the stator windings. The sense of rotation is determined by the resulting circular rotating field. Electrical reversal of the sense of rotation is effected by means of a single-pole changeover switch.

The 12 pole rotor which has a steel shaft polished to a mirror-finish rotates in sintered bronze bearings.

Motor can be provided with Mounting plate/ Screw clip for fixing.


### Standard Data

Motor type		Reversible synchronous
Ambient temperature operation	°C	-15...+55
Ambient temperature storage	°C	-20...+100
Thermal class	°C	105
Electrical Enclosure	IP	40
Connections		Flexible Leads 22 AWG, 200mm length; ends stripped 10 mm
Sense of rotation		Indicated by lead colour (red-CW & black ACW)
Life expectancy		3 Years in continuous operation
Mounting		any position
HVT		As per standard IEC60034-1
Weight	g	400
Rotor stalling		Motor can be stopped when voltage is applied, without being overheated
Rotor shaft		Hardened steel, ground and polished
Bearings		Sintered bronze, self-lubricating, (Ball bearing on request)
External dimensions		dia. 51.5 x 57 mm


### Technical data

Standard Motor voltage (V <sub>N</sub> )	V	24	48	110	220
Operation capacitor (50 Hz) C <sub>N</sub>	µF/VAC	18/50	4.7/100	0.82/250	0.22/500
Operation capacitor (60 Hz) C <sub>N</sub>	µF/VAC	15/50	3.9/100	0.68/250	0.18/500
Lead colour (V <sub>N</sub> )		Blue	Brown	White	Yellow
Tolerance of voltage	%	-10... +15% of rated voltage			
Duty cycle	%	100			
<b>Rated frequency</b>	<b>Hz</b>	<b>50</b>		<b>60</b>	
Power output at rated voltage	W	2.77		2.95	
Speed	Rpm	500		600	
Running torque at rated voltage	Ncm	5.1		4.5	
Power consumption at rated voltage	W	7		7.5	
Detent torque	Ncm	0.8			

### Connection Diagram

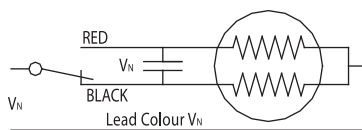

### Ordering Data (eg.)

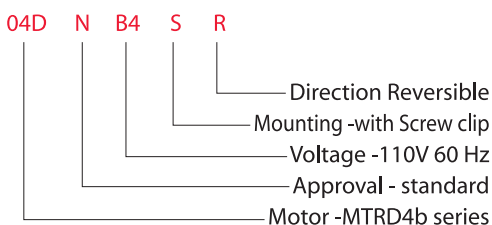

### Dimensional Drawing

